


Sockets and accessories

GZP4


For R4N, R2N

Push-in terminals
(flammability class V-0)
Max. cross section of the cables:
2 x 1,5 mm² (solid wire
without ferrule or stranded wire
with non-insulated ferrule)
2 x 1 mm² (solid or stranded wire
with insulated ferrule)
Stripping length: 8...10 mm


35 mm rail mount
acc. to EN 60715
or on panel mounting
97 x 31 x 45,9(75,8) mm ②
Two poles
12 A, 300 V AC
Four poles
8 A, 300 V AC



Connection diagrams

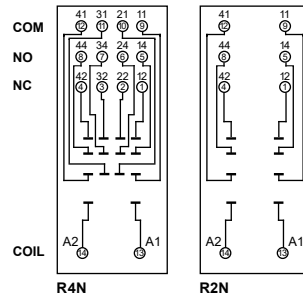

Dimensions

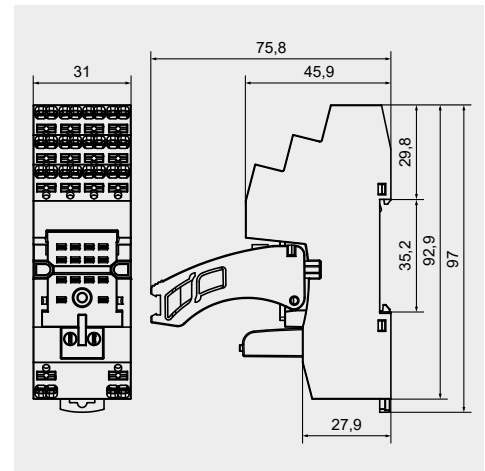

GZP4-0400



GZT4-0040



G4 1052



MP15




ZGZP4-2




ZGZP-2



Module type M...

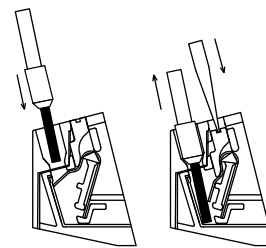

The drawings present inserting wire into the Push-in terminal and removing wire using the button releasing a clamp (assembly without tools).




Accessories ①


SU4D

For R4N

For PCB
29,6 x 21,5 x 11 mm
Four poles
6 A, 250 V AC




Pinout



G4 1053

Wire connection

Dimensions

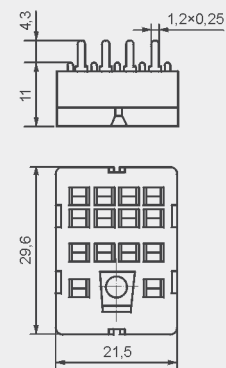


Accessories


G4D

For R4N

For PCB
40,5 x 21,5 x 11 mm
Four poles
6 A, 250 V AC




Pinout



G4 1053

Dimensions

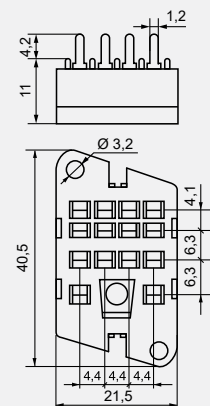

Accessories

① Mounting and sub-assemblies of accessories in the socket; Signalling / protecting modules type M... - see www.repol.com.pl

② In the bracket the height of socket with retainer / retractor clip is shown.