


Sockets and accessories



GZT4 ④

For R4N, T-R4

Screw terminals
Max. tightening moment
for the terminal: 0,7 Nm
35 mm rail mount
acc. to EN 60715
or on panel mounting
76,3 x 27 x 42,5(80) mm ②
Four poles
6 A, 300 V AC



Connection diagram



GZP4-0400

GZT4-0040




GZT4-0035

Module type M... (R4N)

G4 1052 (R4N)


Dimensions

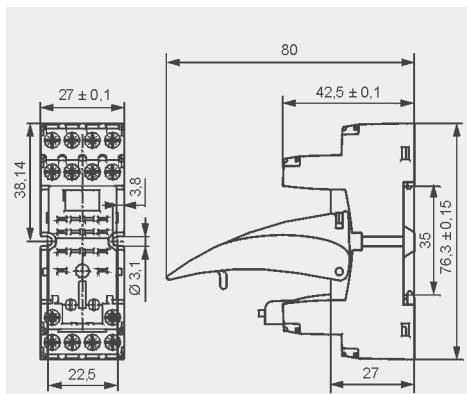



GZM4

For R4N, T-R4

Screw terminals
Max. tightening moment
for the terminal: 0,7 Nm
35 mm rail mount
acc. to EN 60715
or on panel mounting
75 x 27 x 61(82) mm ②
Four poles
6 A, 300 V AC



Connection diagram



GZP4-0400

GZT4-0040




GZM4-0035

Module type M... (R4N)

G4 1052 (R4N)


Dimensions

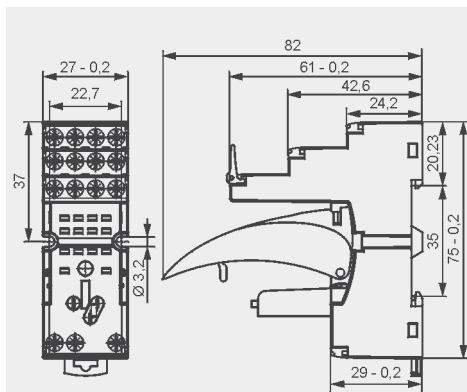


GZ4

For R4N

Screw terminals
Max. tightening moment
for the terminal: 0,7 Nm
35 mm rail mount
acc. to EN 60715
or on panel mounting
66,4 x 29,5 x 29 mm
Four poles
10 A, 300 V AC




Connection diagram



G4 1052

Dimensions

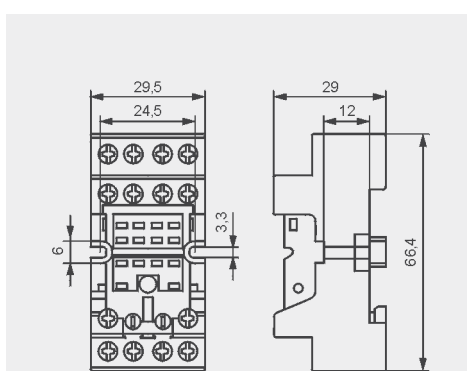


Accessories


GS4

For R4N

Screw terminals
Max. tightening moment
for the terminal: 0,7 Nm
35 mm rail mount
acc. to EN 60715
or on panel mounting
67 x 30,8 x 30(~63,7) mm ⑤
Four poles
10 A, 300 V AC



Connection diagram




GS4-0036



GS4-0035

Dimensions

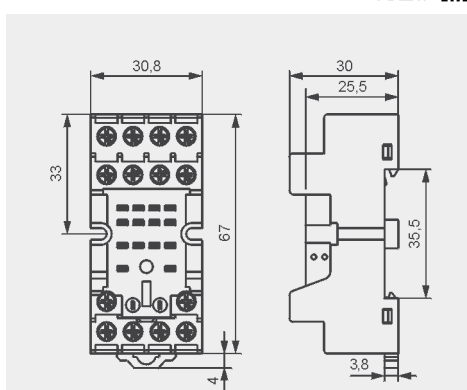

Accessories

- ① Mounting and sub-assemblies of accessories in the socket; Signalling / protecting modules type M... - see www.repol.com.pl
- ② In the bracket the height of socket with retainer / retractor clip is shown. ④ Have obtained LR Type Approval Certificate (Lloyd's Register).
- ⑤ In the bracket the height of socket with spring wire clip is shown.