


Sockets and accessories


PI6W-1P ⑦

For RM699BV, RSR30

Screw terminals
Max. tightening moment
for the terminal: 0,3 Nm
35 mm rail mount
acc. to EN 60715
98,5 x 6,2 x 85,5 mm
One pole
6 A, 250 V AC




Connection diagram



Accessories ⑧




Dimensions

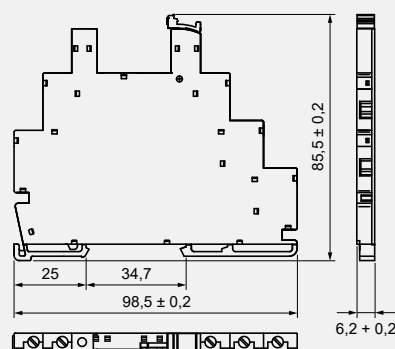


PI6W-1P ⑧

For RM699BV

Screw terminals
Max. tightening moment
for the terminal: 0,3 Nm
35 mm rail mount
acc. to EN 60715
98,5 x 6,2 x 85,5 mm
One pole
6 A, 250 V AC




Connection diagram



Accessories ⑧




Dimensions

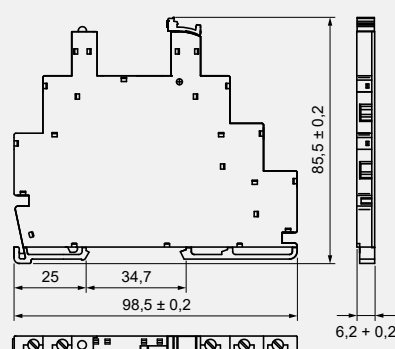


PI6W-1PS ⑧

For RM699BV, RSR30

Screw terminals
Max. tightening moment
for the terminal: 0,3 Nm
35 mm rail mount
acc. to EN 60715
98,5 x 6,2 x 85,5 mm
One pole
6 A, 250 V AC




Connection diagram



Accessories ⑧




Dimensions

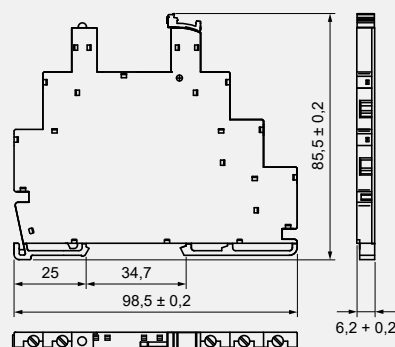


PI6WB-1PS ⑧

For RM699BV, RSR30

Spring terminals
35 mm rail mount
acc. to EN 60715
98,3 x 6,2 x 84,6 mm
One pole
6 A, 250 V AC




Connection diagram



Accessories ⑧



Dimensions

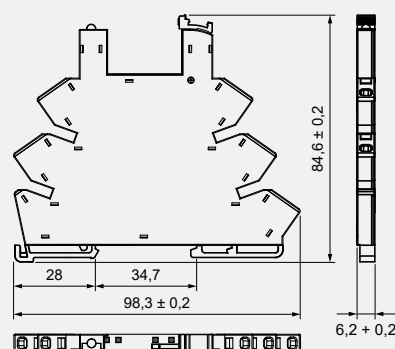

⑦ Sockets without electronic. ⑧ Sockets with electronic PI6W., 6W.: version codes and selection of relays for sockets can be found in the data sheets of interface relays PIR6W., SIR6W. - see www.repol.com.pl ⑨ Colours of strips: ZG20-1, JB20-1 red; ZG20-2, JB20-2 black; ZG20-3, JB20-3 blue.